ADVANCED ENGINEERING UK TECHNOLOGY

vantage
keeping you safe

PEOPLE ENTRANCE MANAGEMENT SYSTEM

V-PM1740SC-TST3

HALF HEIGHT TRIPOD TURNSTILE GATE BARRIER



FEATURES

- Heavy-duty semi-automatic turnstile
- Single/dual core bi-direction operating modes supported
- Half height operation with 550mm standard passage width
- LED status indicator & adjustable time out delay
- Automatic reset of barrier gate after each passage
- Integration support with any RFID/Biometric Reader through NO input
- With functions of anti-tail, anti-reverse pass and so on
- Fail safe & fail lock function supported in case of emergency
- Top quality AISI 304 grade SS construction

LED Direction Indicators	INGRESS PROTECTION RATING	Heavy Duty	Delay Time	Wired Terminal
	IP54	100% Duty Cycle		

CE FC RoHS

TECHNICAL SPECIFICATIONS


V-PM1740SC-TST3

Parameter	Specifications
Passage Width	Standard 550mm
Throughput Rate	30 persons per minute
Passing Time	0-25s default (customizable 0-60s)
Passage Direction	Unidirectional/ bidirectional
Drive	Electro-mechanical solenoid drive (automatic motorized optional)
Power/Mechanism Failure	Fail safe or fail lock status for either one or both directions be in free movement mode (standard) or locks in the home position
Fire Alarm Integration	Supported to provide free passage for evacuation
Movement	Semi-Auto tripod turnstile movement with anti-pass back function
Service Life	>5 million operation cycles
Communication Interface	Relay Input (NO/NC/COMM) & RS485
Operating Voltage	DC 24V
Power Supply Voltage	AC100~240 V
Power Consumption	Max. 50W
IP Rating	IP54
Working Temperature	-20°C~+70°C
Relative Humidity	≤ 90% no condensation
Chassis Material	Top quality AISI 304 grade stainless steel
Arm Material	Top quality AISI 304 grade stainless steel
Dimension Excluding Bars	1400 x 200 x 980 mm
Net Weight Including Bars	35kg single core
Certifications	CE, FCC, ROHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

DIMENSIONS

Unit: mm

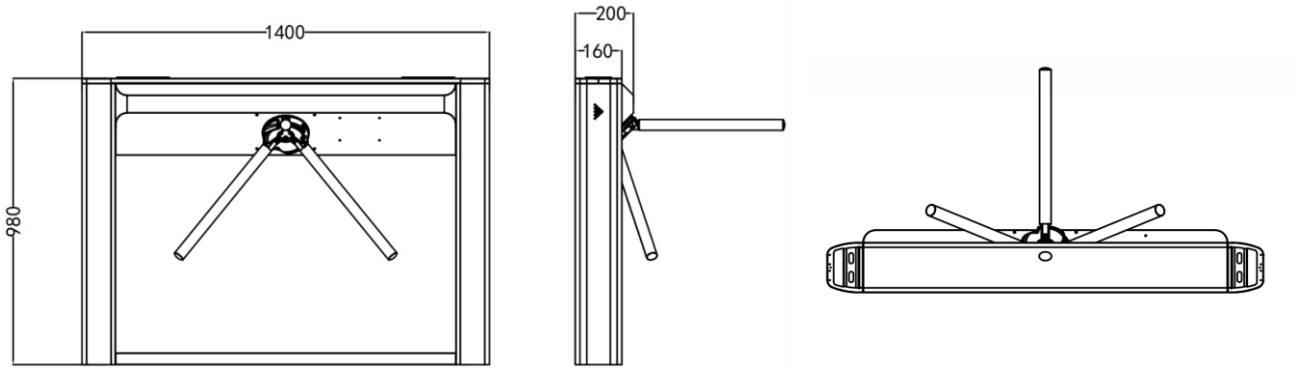

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED.

(AN ISO9001 : 2008, ISO14001:2004 CERTIFIED COMPANY)

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton
West Midlands, WV6 0JZ United Kingdom
Ph:+44-1902-793383, Email: sales@vantagesecurity.com
www.vantagesecurity.com