


PEOPLE ENTRANCE MANAGEMENT SYSTEM

V-PM2100-FTST3 FULL HEIGHT TURNSTILE GATE BARRIER

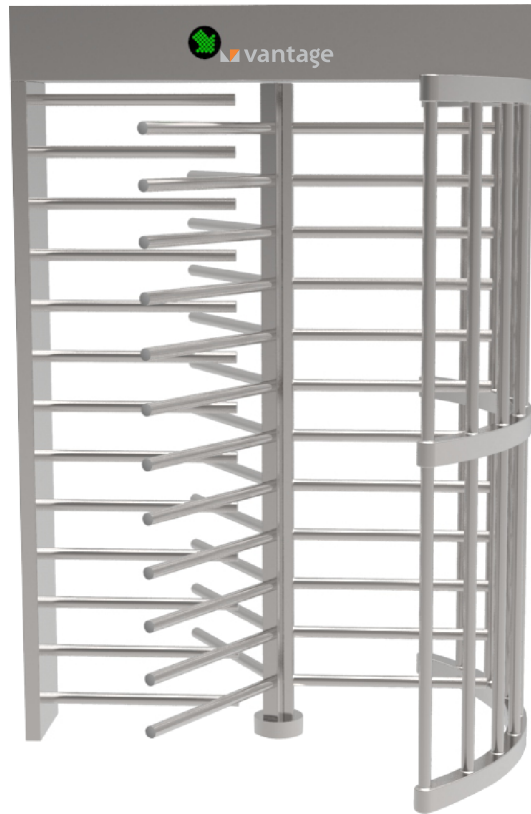

FEATURES

Selectable operating modes- single direction, bi-direction, always free or always locked

Heavy-duty design for 24 hours continue application

LED Direction indicators at each side

IP44 Ingress Protection rating

Automatic reset of barrier gate after each passage

Adjustable time out delay

Integration support with any RFID/Biometric Reader through NO input

Top quality AISI 304 grade SS construction



LED Direction
Indicators



IP44



100%
Duty Cycle



Delay Time



Wired
Terminal

TECHNICAL SPECIFICATIONS

V-PM2100-FTST3

Parameter	Specifications
Passage width	550mm
Throughput rate	Up to 15 p/m
Power supply	220~240 V AC
Operational voltage	24 V DC
Max power consumption	30W
Arms	3 spokes@ 120° angle x 10 rotating arms (standard) 4 spokes@ 90° angle x 10 rotating arms (optional)
Frequency	50~60 Hz
Protection level	IP 44
Working temperature	-25~+70°C
Electro-magnetic drive	DC
Dimension excluding bars	1400x1200x2310mm
Net weight including bars	58 kg
Certifications	CE, FCC, ROHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED.

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902-793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO9001 : 2008, ISO14001:2004 CERTIFIED COMPANY)

