



PEOPLE ENTRANCE MANAGEMENT SYSTEM

V-PM2300-FTST3 FULL HEIGHT DUAL LANE TURNSTILE GATE BARRIER







FEATURES

| Designed for seizure operation with aesthetics in mind | |
|---|--|
| 4x90 degree stop, Dual lane | |
| Corrosion protected SS 304 grade (optional 316 grade) | |
| Padlock & local key operated switch supported each side | |
| Heavy gauge materials meeting ASTM standard | |
| Consist of rotar assembly and shield | |
| Fail safe & fail lock function supported in case of emergency | |
| Dual lane operation for independent to and from operations | |
| Integration support with any RFID/Biometric Reader through NO input | |
| IP54 Ingress Protection rating | |
| | |


CE FC Rons

www.vantagesecurity.com

V-PM2300-FTST3

| Parameter | Specifications |
|---------------------------------------|---|
| Passage Width | 550mm |
| Throughput Rate | 30 persons per minute |
| Access Time Out | Adjustable 1 - 10 sec |
| Solenoid | 24v DC 100% |
| Signal Output | 12v pulse |
| Drive | Electro-mechanical DC motor drive |
| Frequency | 50 or 60 Hz |
| Power/Mechanism Failure | Fail safe or fail lock status for either one or both directions be in free movement mode (standard) or locks in the home position |
| Fire Alarm Integration | Supported to provide free passage for evacuation |
| Output (Rotation Detection Switch) | 10 & 45 Degree rotation of rotor |
| Rotor Release Timer | Selectable between 1 to 6 second in steps of one second |
| Status indicator | Red and green status led lights |
| Protection Level | IP54 (IP55 optional) |
| Humidity | 95% |
| Power Consumption | 30W |
| Working Temperature | -15° C to +55° C |
| Dimension | 2100 x 1200 x 2250 mm |
| Minimum Dimension of Rotor Arm | Arms - 4x90°stop |
| | Dia. of rotor arm- 30mm |
| | Thickness of rotor arm-1.6 mm |
| | 10 Numbers of arms for full height. |
| Gross Weight | Approx 360kg (including packaging) |
| Certifications | CE, FCC, ROHS |

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

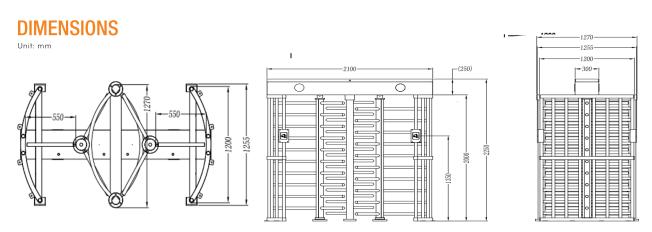

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED.

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton West Midlands, WV6 0JZ United Kingdom Ph:+44-1902-793383, Email: sales@vantagesecurity.com www.vantagesecurity.com (AN ISO 9001 : 2008, ISO 14001 : 2004 CERTIFIED COMPANY)

