

ENTRANCE MANAGEMENT SYSTEM

V-PM3100SC-FBT3 FLAP BARRIER GATE (SINGLE MACHINE CORE)



FEATURES

Heavy duty stainless steel Flap Barrier

LED Direction indicators at each side

Selectable operating modes- single direction, bi-direction, always free or always locked

IP44 Ingress Protection Rating

Automatic reset of barrier gate after each passage

Adjustable time out delay

Integration support with any RFID/Biometric Reader through NO input

Top quality AISI 304 grade SS construction



LED Direction
Indicators

INGRESS
PROTECTION
RATING

IP44



100%
Duty Cycle



Delay Time



Wired
Terminal

TECHNICAL SPECIFICATIONS


V-PM3100SC-FBT3

Parameter	Specifications
Passage Width	550mm
Throughput Rate	35 p/m
Power Supply	100~240 V AC
Motor Voltage	24 V DC
Max power Consumption	35W
Frequency	50~60 Hz
Protection Level	IP 44
Working Temperature	-25°C~+70°C
Electro-magnetic drive	DC
Dimension	1200x280x960mm
Net Weight	45 kg
Certifications	CE, FCC, ROHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Product image & weights, measurements are approximate and may vary.

DIMENSIONS

Unit: mm

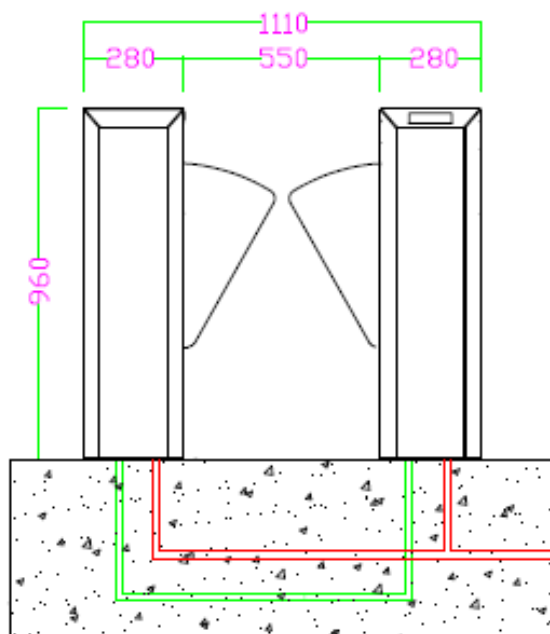

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED.

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902-793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO 9001 : 2008, ISO 14001 : 2004 CERTIFIED COMPANY)

