

PEOPLE ENTRANCE MANAGEMENT SYSTEM

V-PM4000AF-SGT3 P TYPE SWING GATE BARRIER



FEATURES

Heavy-duty electro mechanical swing gate

Selectable operating modes supported - single direction, bi-direction, always free or always locked

LED status indicator & adjustable time out delay

Half height operation with passage width of <600-900mm

Automatic reset of barrier gate after each passage

Integration support with any smart card, RFID/biometric reader through NO input

Top quality AISI 304 grade SS construction with IP54 rating



LED Direction
Indicators

INGRESS
PROTECTION
RATING

IP54



100%
Duty Cycle



Delay Time



Wired
Terminal

TECHNICAL SPECIFICATIONS


V-PM4000AF-SGT3

Parameter	Specifications
Passage Width	Standard 600mm; optional 900mm
Throughput Rate	35-40 persons per minute
Drive	Electro-mechanical DC motor drive
Passage Direction	Unidirectional/ bidirectional
Fire Alarm Integration	Supported to provide free passage for evacuation
Service Life	>5 million operation cycles
Communication Interface	Input (NO/NC/COMM) & RS485
Operating Voltage	DC 24V 150W
Power Supply Voltage	AC100~240 V
Relative Humidity	≤90% no condensation
Working Temperature	-20°C~+70°C
IP Rating	IP54
Chassis Material	Top quality AISI 304 grade stainless steel (optional 316 grade)
Door Material	Stainless steel Bar
Dimension	200x200x1020mm
Net weight	Approx. 30 kg
Certifications	CE, FCC, ROHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

DIMENSIONS

Unit: mm

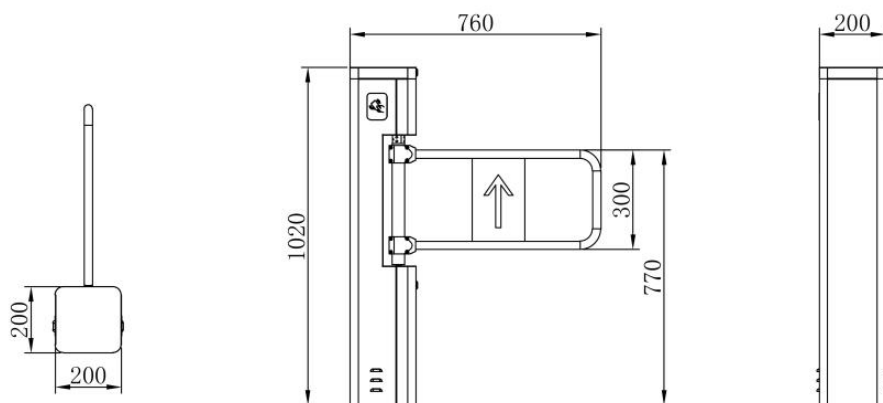

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED.

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton
West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902-793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO 9001 : 2008, ISO 14001:2004 CERTIFIED COMPANY)

