

PEOPLE ENTRANCE MANAGEMENT SYSTEM

V-PM4100-SGT3 SWING GATE BARRIER



FEATURES

Selectable operating modes- single direction, bi-direction, always free or always locked

Heavy-duty design for 24 hours continue application

LED Direction indicators at each side

IP44 Ingress Protection rating

Automatic reset of barrier gate after each passage

Adjustable time out delay

Integration support with any smart card, RFID/ Biometric Reader through NO input

Top quality AISI 304 grade SS construction



LED Direction
Indicators



INGRESS
PROTECTION
RATING
IP44



Heavy
Duty
**100%
Duty Cycle**



Delay Time



**Wired
Terminal**

TECHNICAL SPECIFICATIONS


V-PM4100-SGT3

| Parameter | Specifications |
|------------------------|--|
| Passage width | 1100mm |
| Throughput rate | 10 to 20 p/m with access control and without access control |
| Locking Mechanism | Trigger force for entry and exit |
| Fail safe & Fail lock | Fail safe & Fail lock variants in the event of removal of power supply |
| Power supply | 100~240 V AC |
| Operational voltage | 24 V DC |
| Max power consumption | 35W |
| Frequency | 50~60 Hz |
| Protection level | IP 44 |
| Working temperature | -25~+70°C |
| Electro-magnetic drive | DC motor |
| Dimension | 1200x280x960mm |
| Net weight | 75 kg |
| Certifications | CE, FCC, ROHS |

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

DIMENSIONS

Unit: mm

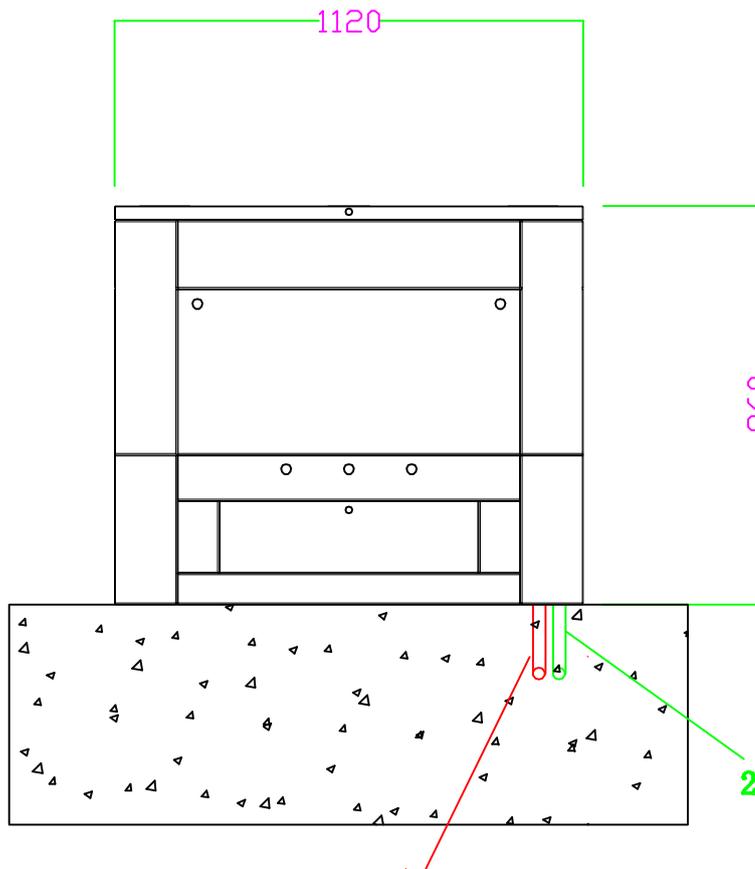

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED.

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902-793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO 9001 : 2008, ISO 14001:2004 CERTIFIED COMPANY)

