

# PEOPLE ENTRANCE MANAGEMENT SYSTEM

## V-PM7000SC-FSGT3 SINGLE LANE FULL HEIGHT SWING GATE



### FEATURES

- Heavy duty full height swing barrier
- Top quality AISI 304 grade stainless steel construction
- Single lane and Bi-directional operations supported
- Integration support with any RFID/Biometric Reader through NO input
- LED traffic guidance cum status indicators at each side
- Automatic system over ride for free passage in case of power failure
- IP65 rated weather protection



LED Direction  
Indicators

INGRESS  
PROTECTION  
RATING

**IP65**



100%  
Duty Cycle



Delay Time



Wired  
Terminal

## TECHNICAL SPECIFICATIONS


### V-PM7000SC-FSGT3

Parameter	Specifications
Power Supply	100V~240V AC
Power Consumption	30W
Driving Voltage	24V
Environment	-15°C~+55°C
Input Signal	Dry contact
Unlock Time	0.2s
Pass Rate	30p/m
Passage Width	1000mm
Dimension	1350x400x2310mm
Certifications	CE, FCC, ROHS

\*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

## DIMENSIONS

Unit: mm

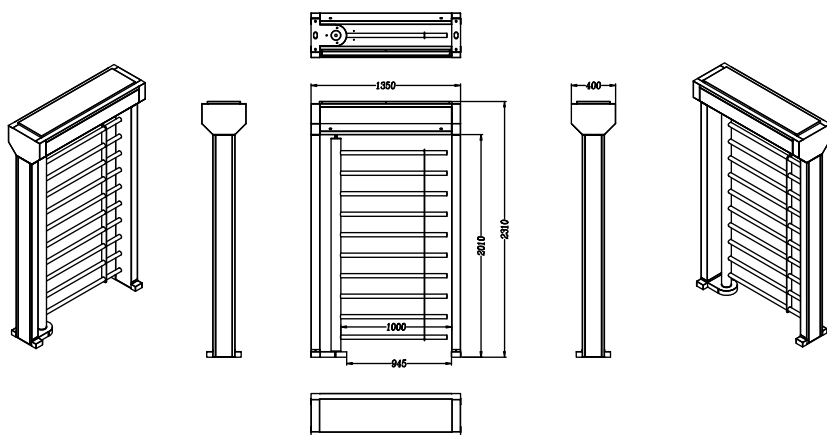

## VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED.

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902-793383, Email: [sales@vantagesecurity.com](mailto:sales@vantagesecurity.com)

[www.vantagesecurity.com](http://www.vantagesecurity.com)

(AN ISO 9001 : 2008, ISO 14001 : 2004 CERTIFIED COMPANY)

