


# IP VIDEO DOOR PHONE SYSTEM

## VP-CS109TS-SIPV2 Outdoor Station With Face Recognition

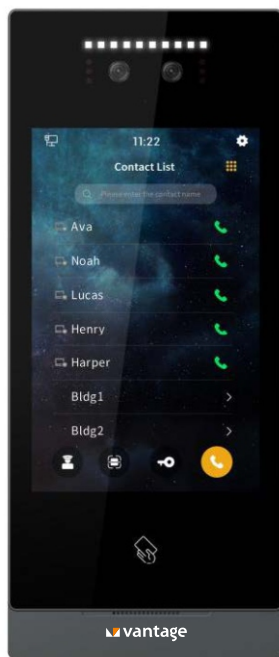

 **Safe Homes.  
Safe Communities.**

### FEATURES

Advanced facial recognition technology with user-friendly system GUI

8-inch IPS LCD touch screen display and 2MP CMOS camera with infrared and white light support for clear visibility in any lighting conditions

Multiple unlock modes, door status detection, timeout alarms, disconnection alarms, tamper alarms, and elevator linkage supported

Auto wake-up via motion detection to improve usability and energy saving

Strong integration and networking capabilities with SIP protocol support

Dual power input 24V DC direct power and 48V PoE are supported

Robust built quality for durability & reliable performance

**FULL  
HD**  
CAMERA



Touch Screen



Night Vision



Face  
Recognition



Two Way  
Communication

## TECHNICAL SPECIFICATIONS


### VP-CS109TS-SIPV2

| Parameter            | Specifications                                     |
|----------------------|--|
| Operating System     | Linux  |
| CPU                  | 2 x Cortex-A7 1.2GHz 32K                           |
| RAM                  | 512MB  |
| Storage              | 4GB  |
| LCD Resolution       | 800x1280   |
| Camera               | 2MP CMOS Color                                     |
| Screen               | 8 inch LCD screen                                  |
| Minimum Illumination | ≤0.15Lux/F2.0                                      |
| FOV                  | H: 61°C,V:35°C                                     |
| Light Filling mode   | Infrared 850nm + white ight                        |
| Face Storage         | 20,000   |
| Focal Distance       | 4.5mm  |
| Ring Duration        | 30 Second  |
| Call Duration        | 120 Second   |
| Monitor Duration     | 30 Second  |
| Working Current      | ≤400 mA (not including power supply for unlocking) |
| Static Current       | ≤150 mA  |
| Working Voltage      | DC 18~30V  |
| Protection           | IP54   |
| Storage Temperature  | -30°C ~ 70°C                                       |
| Working Temperature  | -20°C - +70°C                                      |
| Humidity             | ≤ 95%, no condensation                             |
| Dimension (W/H/D)    | 130x308x26.50 mm                                   |
| Certifications       | CE, FCC, ROHS                                      |

\*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Product image, weights and measurements are approximate and may vary.

## DIMENSIONS

Unit: mm

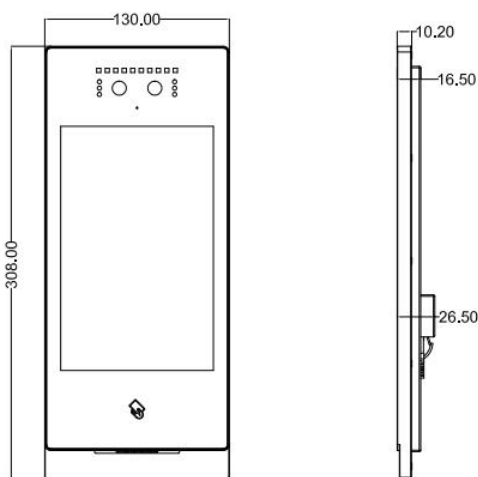

## VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph:+44-1902-793383, Email: [sales@vantagesecurity.com](mailto:sales@vantagesecurity.com)

[www.vantagesecurity.com](http://www.vantagesecurity.com)

(AN ISO 9001 : 2008, ISO 14001:2004 CERTIFIED COMPANY)

