


# DOOR COMMUNICATION SYSTEM PoE GATEWAY

## VP-CS4010AX-PSV2 4 PORT PoE GATEWAY

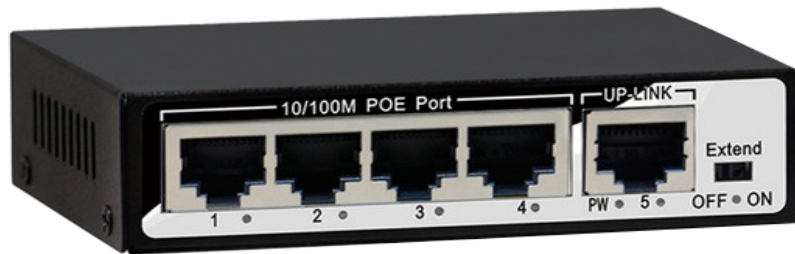

### FEATURES

IEEE802.3 / IEEE802.3U Standard

Full duplex IEEE802.3X standard, half duplex back pressure standard

Support Auto MDI / MDIX, plug and play

Automatically maintain the MAC address list, support two-way address learning function

Each port provides independent bandwidth to provide true non blocking transmission

Dynamic LED indicator light

## TECHNICAL SPECIFICATIONS

# VP-CS4010AX-PSV2

Network Connector	Network Port	1~4 Port : 10/100Mbps POE Ethernet Port Uplink Port : 10/100Mbps Ethernet Port
	Transmission Distance	1~4 Port : 0 ~ 70m Uplink Port : 0 ~ 70m
	Transmission Medium	Cat5/5e/6 standard network cable
Power Over Ethernet	PoE Standard	IEEE 802.3af/at
	PoE Power Consumption	Max 12W (each port)
LED Status Indicator	PoE Ethernet LED	Supported
Network Switch	Network Standard	IEEE802.3, IEEE802.3u, IEEE802.3af
	Bandwidth	1.6Gbps
	Packet Forwarding Rate	10BASE-T:14880pps/port;100BASE-TX:148800pps/port
	Storage Address	2K
Power	Output Voltage	24V
	Input Voltage	DC12V~24V/12V~48V
	Consumption	48W
Environmental	Operating Temperature	-5°C to + 55°C
	Operating Humidity	95% or less (non-condensing)
	Storage Temperature	-40°C to + 70°C
Mechanical	Dimensions	160x94x30mm
	Weight	0.5 KG does not include the power adapter
Certifications	Certifications	CE, FCC, ROHS

## VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph:+44-1902793383, Email: sales@vantagesecurity.com

[www.vantagesecurity.com](http://www.vantagesecurity.com)

(AN ISO 9001 : 2008, ISO14001 : 2004 CERTIFIED COMPANY)

