


IP VIDEO DOOR PHONE SYSTEM

VP-CS92TS-IPV2


Outdoor Station With Face Recognition

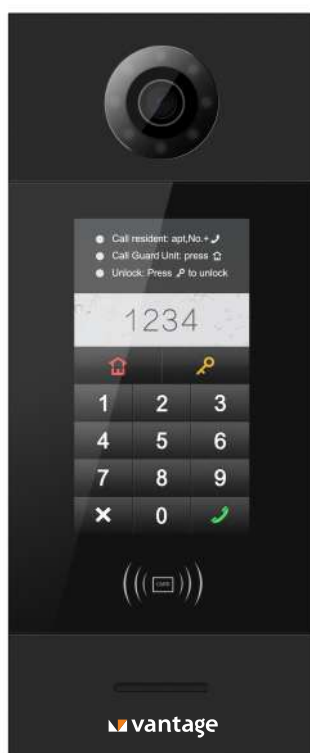

Safe Homes.
Safe Communities.

FEATURES

- 2 MP CMOS color camera
- Display: 7inch LCD with advanced GUI
- Working voltage: DC 24V
- Door status detection
- Support IC Card
- Support face recognition unlock
- Support normally-closed / normally-opened unlock
- Inbuilt microphone and speaker set

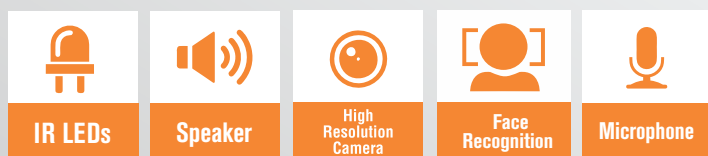

TECHNICAL SPECIFICATIONS


VP-CS92TS-IPV2

Parameter	Specifications
LCD Resolution	600×1024
Camera	2MP CMOS Color
Screen	7 inch TFT screen
Minimum Illumination	0 lux
View Angle	Diagonal 123°
Face Storage	10000
Focal distance	3.5mm
Ring Duration	30 Second
Call Duration	120 Second
Monitor Duration	30 Second
System	Android 6.0.1
Working Current	≤300 mA (not including power supply for unlocking)
Static Current	≤200 mA
Working Voltage	DC24V
Protection	IP54
Storage Temperature	-40°C ~ 70°C
Environmental Temperature	-25°C - +70°C
Humidity	≤ 95%, no condensation
Dimension (W/H/D)	148.5×363×47mm
Certifications	CE, FCC, ROHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Product image, weights and measurements are approximate and may vary.

DIMENSIONS

Unit: mm

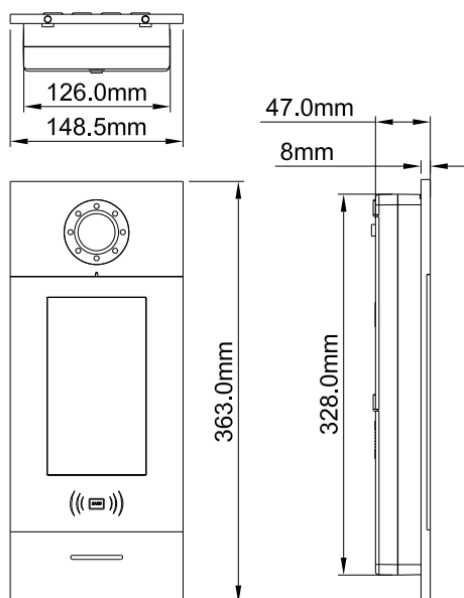

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph:+44-1902-793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO 9001 : 2008, ISO 14001:2004 CERTIFIED COMPANY)

