

# HIGH PERFORMANCE

## H.265+ NETWORK VIDEO RECORDER


# VP-NV34128D-R24ST1

## 128 CHANNEL AI NVR



### FEATURES

- Up to 16 Megapixels Resolution Display and Recording
- H.265+ video compression technology with real time encoding
- Preview, record, playback, backup and remote access are supported
- Full function CMS (Central monitoring software) supported
- Support RAID 0, 1, 5, 6, 10
- Support face detection and comparison
- ONVIF Supported
- Supports remote monitoring on Mobile Client (Android, IOS) and IE
- Support multiple VCA (Video Content Analytics) events, such as region intrusion, tripwire, etc.



## TECHNICAL SPECIFICATIONS

# VP-NV34128D-R24ST1

System	Operating System	Embedded Linux Operating System
	Multiplex Operations	Simultaneous multi-channel real-time recording, playback, network operation, USB backup
	User interface	Support 16-bit true color graphical menu interface and mouse operation
Bandwidth	Incoming/Outgoing	768Mbps / 768Mbps
Interface	IP Video Input	128-ch
	Two way Audio Input	1-ch, RCA
	VGA Video Output	VGA x 1 : 1920x1080, 1280x1024, 1024x768
	HDMI Output 1	7680x4320@60,7680x4320@30,3840x2160@60,3840x2160@30,1920x1080, 1280x1024,1024x768
	HDMI Output 2	3840x2160@60, 3840x2160@30, 1920x1080, 1280x1024, 1024x768
	HDMI Output 3	3840x2160@60, 3840x2160@30, 1920x1080, 1280x1024, 1024x768
	HDMI Output 4	1920x1080, 1280x1024, 1024x768
	Audio Output	1-ch, RCA
	HDMI Audio Output	Supported
	Network	4 x Gigabit (10/100/1000) ethernet port (RJ45)
	USB	USB 3.0 x 1, x USB 2.0 x 3 (Front:2)
	Alarm Input	24 CH
	Alarm Output	8 CH
	Resolution & Frame Rate	RS485 Port
RS232		Supported
Multi-screen Display		Main output: 1/4/6/8/9/13/16/25/32/36/64 AUX output 1: 1/4/6/8/9/13/16/25/32/36 AUX output2: 1/4/6/8/9/13/16 AUX output 3: 1/4/6/8/9/13/16 Max. 132(64+36+16+16)
Video Compression		H.264/H.265/H.265+/H.265S
Audio Compression		G.711(U/A)
Recording Resolution		16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280x1024/960P/720P/960H/D1/CIF
Frame Rate		25fps (PAL) / 30fps(NTSC)
Network & Remote Monitoring	Live View	1CH 16MP@30 / 4x12MP (only available for main output)
	Playback	1CH 16MP@30 / 4x8MP(only available for main output)
	Simultaneous Playback	Max 16 ch playback
	Protocol	TCP/IP, HTTP, HTTPS, 802.1x, FTP, DHCP, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IPv6, UDP, PPPoE, SNMP, IGMP
	DDNS	Supported; Dynamic and Static IP support
Network & Remote Monitoring	CMS	Full function CMS (Central Monitoring Software)
	Mobile Client Application	Supports android and iOS APP for Smart phone and tablets
	Client Connection	Max. 128 users access
	Bandwidth control	CBR (Manual) supported

## TECHNICAL SPECIFICATIONS

# VP-NV34128D-R24ST1


Face Detection	Face Detection Performance (AI by IPC)	128CH
	Face Detection Performance (AI by Device)	4CH
	Face Match Performance	16CH
	Comparison Capability	36 pictures / second
	Face Picture Database	32 libraries 10000 Face Pictures
	Face Picture Search	Search by picture is supported
	Database Management	Add, modify, delete and search face pictures
	Face Picture Adding	Add face pictures through APP, WEB and external import
	Face Picture Comparison	Supports successful face recognition alarm and stranger match alarm
	Face Track	Track display on a map
	Statistic Graph of Face Information	Bar graph
	Statistic Mode of Face Information	Statistics by day, week, month, quarter as well as customized time period
Video Structure Analysis	Human/Vehicle Classification (AI by IPC)	128CH
	Human/Vehicle Classification (AI by Device)	8CH
	Human/Vehicle Attribute Analysis	Yes, supported
Features	Security	Password protection, user management
	Playback Function	Play, pause, FF, Rewind, digital zoom, previous frame, next frame, etc.
	Search Mode	Time slice/time/event/tag/smart search
	Alarm Mode	Manual, sensor, motion, exception, smart events
	Alarm Trigger	Record, snapshot, preset, e-mail, etc..
Recording & Storage	Recording Mode	Manual/timed/motion/sensor/POS/AI recording
	Storage	24 SATA port up to 10TB each
	e-SATA	e-SATA x 2
	RAID	RAID0, RAID1, RAID5, RAID6, RAID10 supported
	SFP Interface	SFP x 2
	Storage Expansion	Mini SAS x 2
	12V Output	Yes (1A)
	Power Switch	Yes, supported
	Failover	Supports N+1 redundancy
General	Power Supply	Redundant, AC100V-240V
	Power Consumption	<50W (Hard disk not included)
	Operating Temperature	-10°C to + 50°C
	Working Humidity	10%~90%
	Dimensions	483x515x175mm
Certifications	Certifications	UL, CE, FCC, RoHS

\*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Product image, weights and measurements are approximate and may vary due to customized solutions & products being offered as per customer requirements.

# VP-NV34128D-R24ST1

## DIMENSIONS

Unit: mm

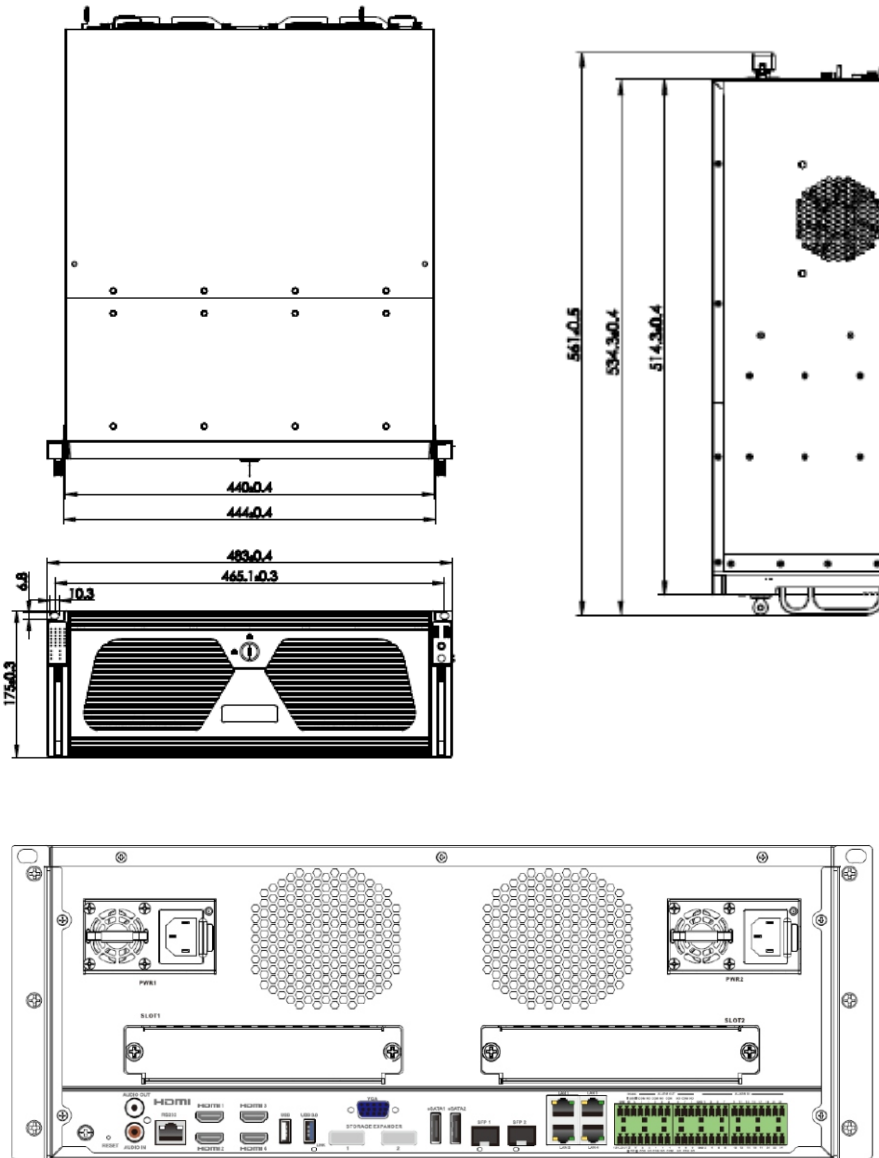

## VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902-793383, Email: sales@vantagesecurity.com

[www.vantagesecurity.com](http://www.vantagesecurity.com)

(AN ISO 9001 : 2008, ISO 14001: 2004 CERTIFIED COMPANY)

