


# PEOPLE ENTRANCE MANAGEMENT SYSTEM

## VP-PM5110SC-SGT3 SINGLE CORE SWING BARRIER GATE

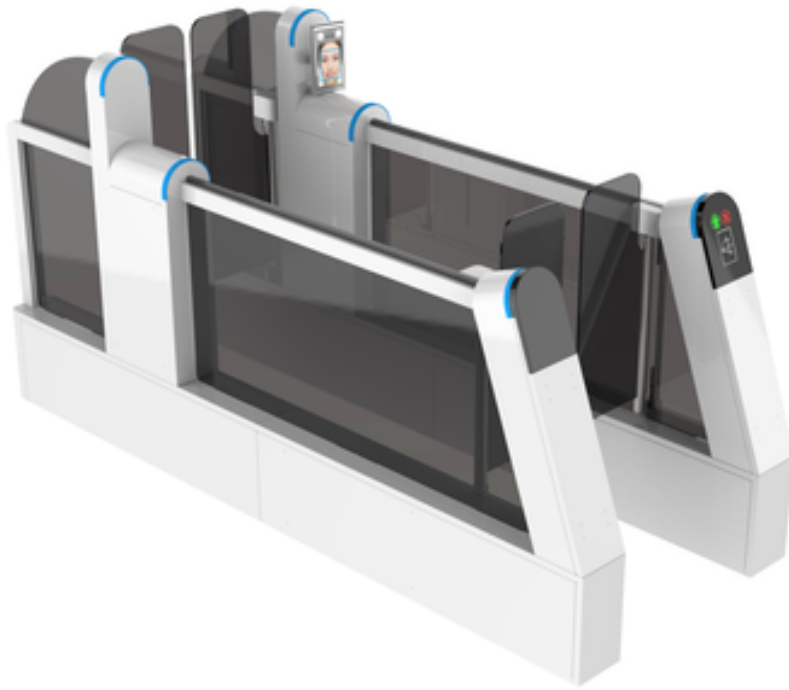

### FEATURES

- Speed gate series dual swing barrier for multi-level security
- Single machine core with Bi-directional operation supported
- Integration support with any access control readers-  
Face & Fingerprint/ QR Code/RFID/NFC
- LED Direction indicators at each side
- Half height operation with passage width of  $\leq 600\text{mm}$
- Throughput rate of 35 persons/minute
- High Security with built-in anti-tailing & anti-collision sensors
- Top quality AISI 304 grade SS construction with IP44 rating



LED Direction  
Indicators

INGRESS  
PROTECTION  
RATING

**IP44**



100%  
Duty Cycle



Delay Time



Wired  
Terminal

## TECHNICAL SPECIFICATIONS




### VP-PM5110SC-SGT3

Parameter	Specifications
Passage Width	600mm
Throughput Rate	35 p/m
Flap Type	Acrylic flaps with integrated mold machine core
Communication Interface	RS232/RS485
Power Supply	100~240 V AC
Operational Voltage	24 VDC
Max Power Consumption	35W
Frequency	50~60 Hz
Protection Level	IP44
Working Temperature	-25°C~+70°C
Electro-Magnetic Drive	DC
Dimension	2850x215x1400mm
Net weight	100 kg
Certifications	CE, FCC, ROHS

\*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Product image & weights, measurements are approximate and may vary.

## DIMENSIONS

Unit: mm

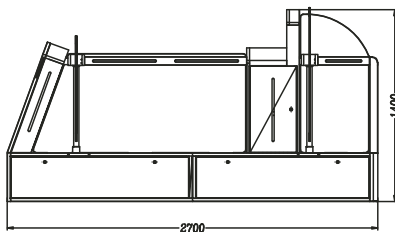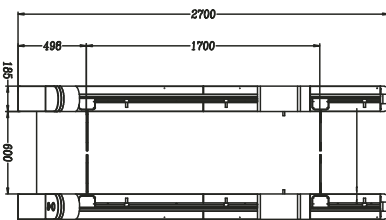

## VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED.

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902-793383, Email: sales@vantagesecurity.com

[www.vantagesecurity.com](http://www.vantagesecurity.com)

(AN ISO 9001 : 2008, ISO 14001:2004 CERTIFIED COMPANY)

