



IMAGING & SCREENING SECURITY SYSTEM

VP-XR1010S-NCBSJ8

X-RAY BAGGAGE SCANNER WITH BUILT-IN CAMERA





FEATURES

X-ray generator with 7 Colors image displaying technology for advance material classification

Dual energy penetration system supports organic/inorganic discerning for efficient security

Versatile software with more than 30 image processing functions including auto-inspection of drugs and explosives

Supports real-time storage and retrieval of scanned images

Enhanced imaging software with density alerts and threat material prompts to assist operator

System initiates auto-diagnostic and calibration automatically at power on

Suitable for scanning mid-sized and large baggage at airports, bus/train/metro stations, borders/immigration security check points

Integrated entry/exit surveillance monitoring cameras (optional)


VP-XR1010S-NCBSJ8

X-Ray Generator	Tunnel Size	1010(W)x 1005(H)mm
	Wire Resolution	40 AWG
	Spatial Resolution	1.0 mm Horizontal, 1.0 mm Vertical
	Steel Penetration	36mm
	X-Ray Direction	Diagonally Downward
	X- Ray Generator	160KV
	X-Ray Leakage	≤ 0.1 mR/hr(1.0 µSv/hr)
	S/N Ratio	<45dB
	Conveyor Speed	0.23m/s
	Conveyor Height	344mm
	Conveyor Max Load	250kg
	Tube Current	0.1-1 mA (adjustable)
	Cooling	Sealed Oil Bath with Forced Air
	Duty Cycle	100%,no warm-up procedure required
	Film Safety	Guarantee ISO 1600 (33 DIN)
	Storage Capacity	Up to 2,00,000 images stored automatically.
Image Processing System	Operation System	Windows®OS (standard)
	Display	Single 21.5" LCD color, resolution: 1980 x 1080
	Operation Console	Available /optional
	Storage	1TB SSD (standard)
	Keyboard	Keyboard included
	Roller Table	Integrated with tunnel
	X-Ray Sensor	L-shaped photodiode array detector (dual energy),24bit depth
	Color Image Display	24 bit color display
	Edge Enhancement	Supports clear outlining of the object edges
	Image Recall	Supports 30 images recallable
Camera System	Multiple Cameras Inbuilt	Built in protected cameras to monitor baggage, passenger and environment at entry and exit
Power & Environmental	Working Temperature	0°C~40°C
	Storage Temperature	-20°C-60°C
	Humidity	Up to 95% Non-Condensing
	Working Voltage	AC220V(±10%) 50/60Hz, 10A Max
	Automatic Voltage Regulator	Supported
	Power Consumption	Max. 800W
Mechanical	Dimensions	3052(L)x1813(W)x1780(H)mm
	Net Weight	1020kg
Certifications	Certifications	CE, FCC,RoHS, FDA
Commons	G G	<u></u>

^{*}Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

DIMENSIONS

Unit: mm

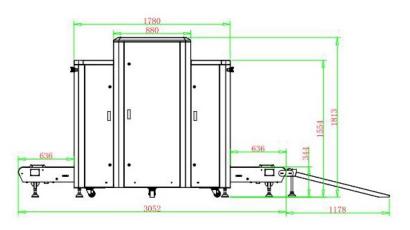




Software Advantages:

■ 4 & 7-COLOR IMAGING

The innovative 7-color imaging dual-energy technology is an advance material classification system which enables operator to view screened objects in 7 colors, each color correlate to a specific range of atomic number. It colors the 3-Kerosene with RED, hence easier to detect threats.

Combine with the Zeff-scan function to auto-highlight the potential threat of explosive and narcotic (Zeff 7.8.9) on X-ray image in real time during scanning process according to the characteristics range of explosives and narcotics atomic number (Zeff 7.8.9), which help to identify the suspicious material more effectively.

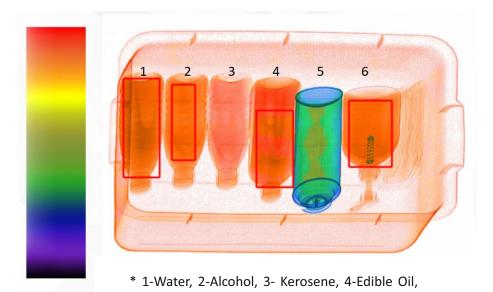

DUAL-ENERGY CLEAR IMAGING & SPLIT-SCREEN TECHNOLOGY

Dual-energy supports to identify then display the objects concealed in bag in the specific color according to their atomic number, the metallic (guns, bullet, knife) can be seen in blue, the organic (plastic, cloth, currency) can be seen in orange.

5-Liquified Natural Gas, 6-Antibacterial Hand Gel

It also supports multiple Split-screen and Full-screen options for optimal viewing, operator can customize the color mode of the switchable main screen and auxiliary screen respectively



■ Software Advantages:

The software is to control the X-RAY baggage scanner as well to acquire and process the X-RAY image with different tools to find the potential threat, all the tools can be controlled by Exclusive Control Panel.

IMAGING PROCESSING TOOLS

- Switchable 4 and 7 Colors Mode
- Inverse Mode
- Gray
- · Variable Gamma
- Organics & Inorganic & Mixture Striping
- Plus 6 kinds Pseudo Color Display
- Variable High & Low Penetration
- Log & Exp Trans
- · Gaussian Blur& Sharpen
- Super & Partial Enhancement
- High & Low & Fusion Energy
- Density Threshold Alarm(DTA)
- Continuous Zoom(64X)
- Splicing-scan(S-scan)
- Continuous Scan(C-scan)
- Zeff-scan(Z-scan)
- Al Roller(optional)
- · Reset Image
- Calibration

AUXILIARY FUNCTIONS

- · Bidirectional Scanning
- · Recall Historical Image
- · Query & Backup & Mark Image
- · Print Image
- Baggage Counter
- Day/Time Display
- Multi-language Operation
- Auto Image Archiving
- · Storage Type:PNG, JPEG, BMP
- Start-up Self-diagnostics
- Real-time Image Manipulation
- Different Access Level Account
- Network Ready
- Secure Access Key
- Emergence Stop Button
- 1mtr Roller Table (Optional)
- Interlock(optional)
- Threat Image Projection(TIP)(optional)
- Operator Training System (OTS)(optional)

(AN ISO 9001: 2008, ISO 14001: 2004 CERTIFIED COMPANY)





