

IMAGING & SCREENING SECURITY SYSTEM

VP-XR1518D-BSS16

DUAL GENERATOR AND DUAL VIEW X-RAY CARGO SCANNER



FEATURES

- Radiation safe dual X-ray generator technology with high penetration
- Suitable for scanning large baggage at borders/immigration security check points and cargo terminals
- Dual view display with high resolution imaging for efficient security
- Clear and distinct imaging with improved zooming ratio up to 64 times
- Dual energy penetration system supports high/low density and organic/inorganic discerning
- Auto-inspection of drugs and explosives with threat alert system
- Supports real-time storage and retrieval of scanned images
- Energy saving & environmental protective design

TECHNICAL SPECIFICATIONS


VP-XR1518D-BSS16

X-Ray Generator	Tunnel Size	1505(W) x1800(H)mm
	Wire Resolution	36AWG
	Penetration Resolution	30AWG
	Steel Penetration	38-40 mm
	Spatial Resolution	Vertical: diameter 1.3mm, horizontal: diameter 1.3mm
	Tube Voltage	200KV
	Beam Direction	Vertical and Horizontal
	Cooling	Sealed oil cooling
	Duty Cycle	100%
	Noise Level	≤60dB
	X Ray Dose Per Inspection	≤ 4.8μSv
	Duty Cycle	100%
	Radiation Leakage	≤1μSv/h at any point 5 cm outside the external surface. FDA standard is ≤5μSv/h
	X Ray Generator	Two generators for dual view
Image Processing System	Computer Console	Single console with 3.3 GHz core CPU, 4GB RAM, 1 TB HDD, keyboard
	Operating System	Windows 10
	Zoom	Variable zoom up to 64X, supports continuous magnification
	Display	2 x 27 inch monitor, full HD resolution 3840x2160
	Image Retrieval	30 images
	Image Archive	Up to 50,000 images stored automatically, can be transferred to USB drive
	Film Safety	In accordance with ASA/ISO1600 film safe standard
	Optional Functions	Video surveillance system, LED prompt screen, voltage stabilizer, UPS back up
	Image Processing	Color / black & white imaging, local enhancement, high penetration, low penetration, organic and inorganic discerning, reverse color, brightening, darkening, gray level scan/ variable density, pseudo color imaging, edge enhancement imaging etc. Alerts upon of detection of suspicious items.
Mechanical	X-Ray Sensor	L-shaped array detector
	Conveyor Speed	0.22 m/s forward or backward
	Conveyor Height	350mm
	Load Capacity	2000 kgs
	Roller Table	Integrated on both sides
	Electric Motor	3 Phase
	Overall Dimensions	7787(L)x2423(W)x2837(H)mm
	Net Weight	4000kg
Power & Environmental	Working Temperature /Humidity	5 °C ~ 40°C/ 0%-90%(non-condensing)
	Storage Temperature /Humidity	-20°C-60°C /10%-90%(non-condensing)
	Working Voltage	AC220V(+10% ~ -15%) 50±3Hz
	Power Consumption	Max. 2.5KW
Certifications	Certifications	CE, FCC, RoHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

VP-XR1518D-BSS16

Dimension:

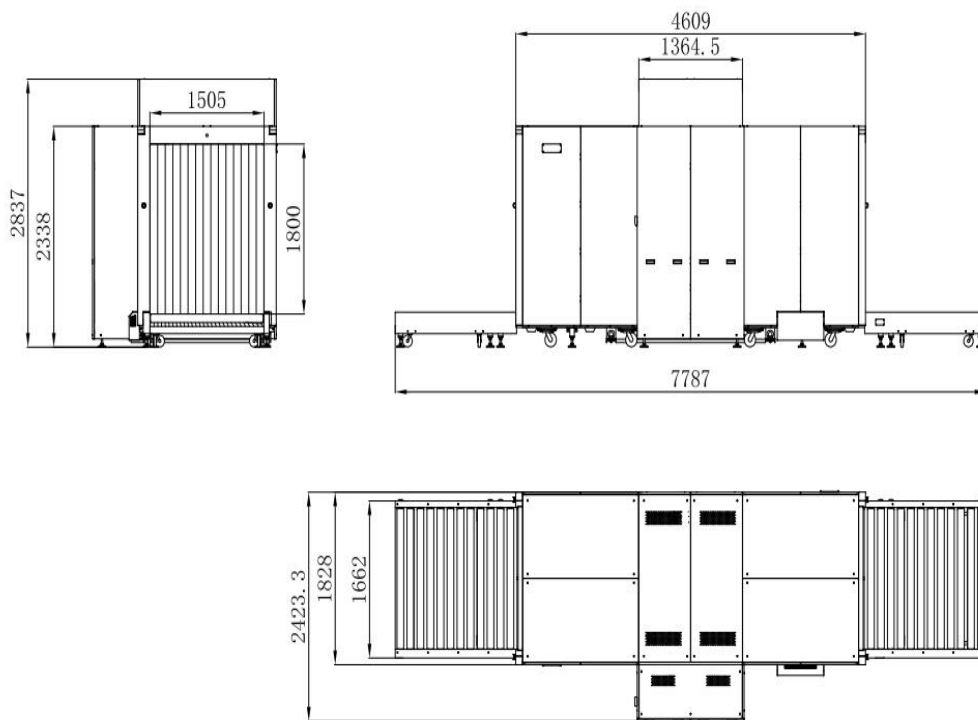

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902-793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO 9001 : 2008, ISO 14001 : 2004 CERTIFIED COMPANY)

