

HIGH DEFINITION

2MP ANALOG BULLET CAMERA

VV-AC2M80B-M09VFT1

IR NIGHT VISION VARIFOCAL CAMERA



FEATURES

2 Megapixel HD resolution (1920x1080 pixels)

1/2.8" Progressive Scan CMOS sensor

AHD/TVI/CVI/CVBS camera supported

Inbuilt IR LEDs for 30 ~ 50mtr IR range

High performance IR Cut mechanical filter for True Day & night vision

Up to 1000 TVL resolution

Auto color to B / W at low illumination

IP67 Weather proof outdoor enclosure



TECHNICAL SPECIFICATIONS

VV-AC2M80B-M09VFT1



Camera	Image sensor	1/2.8" Progressive Scan CMOS Sensor
	Signal System	PAL/NTSC
	Effective Pixels	1920 (H) × 1080 (V)
	Frequency	PAL / NTSC
	Image Resolution	2 Megapixel
	Minimum Illumination	Color : 0.001 lux@F1.2, AGC ON; B/W : 0 lux with IR
	Signal to Noise	≥52dB (AGC OFF)
	Shutter Time	Auto; 1/25s~1/50000s(PAL); 1/30s~1/50000s(PAL)
	Gain Control	Auto
	White Balance	Auto / Manual
	Angle Adjustment	Pan: 0°~360°; Tilt: 0°~80°; Rotation: 0°~360°
Lens	Lens Type	2.8-12mm, varifocal lens
	Lens Mount	D14
Day/Night Functionality	Day & Night	True Day & Night
	IR Cut	High performance Mechanical IR Cut Filter with auto switch
	IR Source	High performance IR LEDs with intensity control
	IR Range	30 ~ 50 m
Operational Features	Wide Dynamic Range (WDR)	120dB
	Smart IR	Supported
	Frame Rate	30fps(60Hz); 25fps(50Hz)
	OSD Menu	Supported
	Digital DNR	Supported 3D DNR
	BLC	Supported
	HLC	Supported
	Privacy Mask	Supported
	Motion Detection	Supported
	Mirror	Supported
	Freeze	Supported
	LSC	Supported
	Image Setting	Supported
	Defect Correction	Auto
Interface	Video Output	AHD / TVI /CVI/CVBS Video output
	Power Input	Standard DC Jack
Electrical	Power Requirement	DC 12V (± 15%)
	Power Consumption	IR OFF : < 1.5W; IR ON : < 6W
Environmental	Enclosure	IP67 Weather proof outdoor enclosure
	Mounting bracket	Integrated mounting bracket with cable management
	Operating Temperature	-30°C to + 50°C
	Operating Humidity	90% (relative humidity)
Mechanical	Color	White
	Dimensions	217.7 x 80.5 x 80.5mm
	Weight	Approx. 0.56KG
Certification	Certification	CE, FCC, RoHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

TECHNICAL SPECIFICATIONS

VV-AC2M80B-M09VFT1

Dimension:

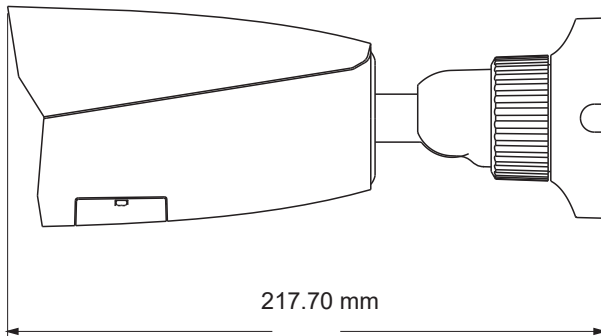

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO 9001 : 2008, ISO14001 : 2004 CERTIFIED COMPANY)

