



FULL HIGH DEFINITION 2 MP LPR CAMERA

W-AC2MA2B-SN27LPS2

IR NIGHT VISION LICENSE PLATE RECOGNITION CAMERA





FEATURES

Full high definition 2MP (1920 x 1080) resolution

Back Light compensation (BLC) Supported

Inbuilt Motion Detection Supported

High Light compensation (HLC) Supported

Automatic White Balance

Privacy Masking Supported

IP 66 Weather proof outdoor enclosure











VV-AC2MA2B-SN27LPS2

Camera	Image Sensor	1/3" Progressive Scan Sensor
	Signal System	PAL/NTSC
	Effective Pixels	1920(H) × 1080 (V)
	Frequency	60 Hz (NTSC)/ 50 Hz (PAL)
	Horizontal Resolution	2MP
	Minimum Illumination	Color: 0.01Lux @ F1.2, B/W: 0.0015 lux @ F1.4, 0 lux at IR or
	Signal to Noise	> 62 dB
	Gain Control	Auto/Manual
	White Balance	Auto/Manual
	DNR	Inbuilt 3D DNR (Digital Noise Reduction) circuit
	Auto Iris	DC Drive
	Gamma Correction	0.45
	Sync System	Internal
Lens	Lens Type	8mm IR corrected lens
	Lens Mount	M12
	Focus	Fixed
	Zoom	Fixed
	Day & Night	True Day & Night with ICR
	IR Cut	High performance Mechanical IR Cut Filter with auto switch
Day/Night Functionality	IR Source	Inbuilt 2 X 4th Generation White Light Source Chip Array
	IR Range	Up to 30 Mtrs
	IR Life	40000 operation hours
	OSD Menu	Supported
	OSD Joystick	Supported
Operation	Camera ID	On/Off
	Privacy Masking	Up to 4 zone supported
	Motion Detection	Up to 4 zone supported
	BLC	Supported
	HLC	Supported
	Video adjustment	Supported
	Electronic Shutter Speed	1/50 - 1/100000
Interface	Video Output	1.0 Vp-p, 75 Ohm Composite CVBS
	Power Input	Standard DC Jack
Electrical	Power Requirement	DC 12V (± 10%)
	Power Consumption	Max 9 W
Environmental	Enclosure	IP 66 Weather proof outdoor enclosure
	Mounting bracket	External Mouting Bracket Excluded
	Operating Temperature	-20°C to + 60°C
	Operating Humidity	95% or less (non-condensing)


VV-AC2MA2B-SN27LPS2

Mechanical	Color	White
	Dimensions	215 X 138 X 105mm
	Weight	850g
Certifications	Certifications	CE, FCC, RoHS

^{*}Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

DIMENSIONS

Unit: mm

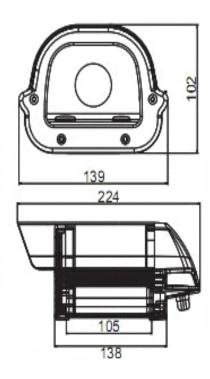

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton West Midlands, WV6 0JZ United Kingdom Ph:+44-1902793383, Email: sales@vantagesecurity.com





(AN ISO 9001: 2008, ISO 14001: 2004 CERTIFIED COMPANY)

