

FULL-COLOR HIGH DEFINITION 5MP ANALOG BULLET CAMERA

VV-AC5M78B-M10F3T1 IR NIGHT VISION FIXED CAMERA



FEATURES

5 Megapixel Full color HD resolution (2560x1936 pixels)

1/2.5" Progressive Scan CMOS sensor

AHD/TVI/CVI camera supported

Inbuilt IR LEDS for 20 ~ 30 mtr IR range

High performance IR Cut mechanical filter for True Day & night vision

Up to 1500 TVL resolution

High performance IR with intensity control

IP67 Weather proof outdoor enclosure



TECHNICAL SPECIFICATIONS

VV-AC5M78B-M10F3T1

Camera	Image sensor	1/2.5" Progressive Scan CMOS Sensor
	Signal System	PAL/NTSC
	Effective Pixels	2560 (H) x 1936 (V)
	Frequency	PAL / NTSC
	Image Resolution	5 Megapixel
	Minimum Illumination	0 Lux at IR on
	Signal to Noise	≥52dB (AGC OFF)
	Electronic Shutter	Auto; 1/50s~1/000000s(P); 1/60s~1/100000s(N)
	Gain Control	Supported
	White Balance	Auto
	Angle Adjustment	Pan: 0°~360°; Tilt: 0°~80°; Rotation: 0°~360°
Lens	Lens Type	3.6mm lens
	Lens Mount	M12
Day/Night Functionality	Day & Night	True Day & Night
	IR Cut	High performance Mechanical IR Cut Filter with auto switch
	IR Source	High performance IR LEDs with intensity control
	IR Range	Up to 30 mtrs
Operational Features	Wide Dynamic Range	Digital WDR
	Smart LED	Supported
	Frame Rate	5MP@20fps/4MP@30fps
	OSD Menu	Supported
	Digital DNR	Supported 2D DNR
	BLC	Supported
	Global Exposure	Supported
	Image Setting	Supported
	Defect Correction	Auto
Interface	Video Output	AHD / TVI /CVI Video output
	Power Input	Standard DC Jack
Electrical	Power Requirement	DC 12V (± 10%)
	Power Consumption	<3 W with IR on
Environmental	Enclosure	IP67 Weather proof outdoor enclosure
	Mounting bracket	Integrated mounting bracket with cable management
	Operating Temperature	-30°C to + 50°C
	Operating Humidity	90% or less (non-condensing)
Mechanical	Color	White & black
	Dimensions	165.7 x 69 x 69mm
	Weight	Approx. 0.37KG
Certification	Certification	CE, FCC, RoHS



*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

TECHNICAL SPECIFICATIONS

VV-AC5M78B-M10F3T1

DIMENSIONS

Unit: mm

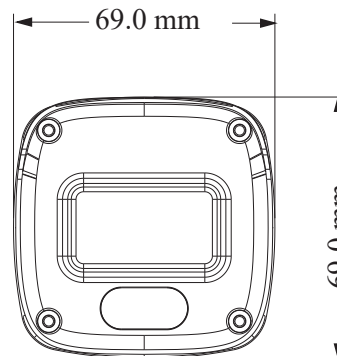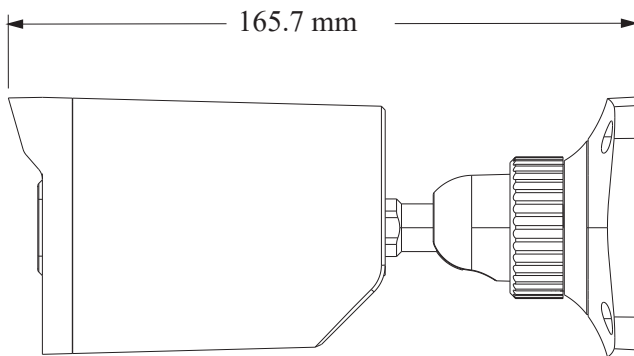

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO 9001 : 2008, ISO14001 : 2004 CERTIFIED COMPANY)

