

ULTRA HIGH DEFINITION 6MP IP BULLET CAMERA

VV-NC41396B-AZWLIR1T1
FULL COLOR DUAL ILLUMINATION MOTORIZED CAMERA



COLOR ON
CAMERAS

FEATURES

Ultra high definition 6MP (3200 x 1800) resolution

1/2.39" progressive scan CMOS sensor

Dual night vision modes with smart IR LED and white LED supplementary light

High performance IR cut mechanical filter for true day & night vision

Inbuilt 120dB WDR, 3D DNR, HLC, BLC, & ROI functions

Support triple streams

Inbuilt smart analytics supported

IP66 weather proof enclosure



TECHNICAL SPECIFICATIONS

VV-NC41396B-AZWLIR1T1

Camera	Image Sensor	1/2.39" progressive scan CMOS sensor
	Signal System	PAL/NTSC
	Effective Pixels	3200 (H) × 1800 (V)
	Minimum Illumination	Color : 0.02 lux @F1.6, AGC ON;B&W: 0 lux with illumination on
	Electronic Shutter Speed	1/3s ~ 1 / 100000s
	Gain Control	Auto
	Signal to Noise	> 50 dB
	Iris	Fixed
Lens	Lens Type	2.8~12mm@F1.6,motorized lens
	Lens Mount	Ø 14
	Focus	Motorized
	Field of View	H.FoV: 108°~36°; V.Fov: 57°~20°;D.FoV: 129°~42°
Day/Night Functionality	Day & Night	Auto, Day, Night, Timing
	IR Cut	High performance Mechanical IR Cut Filter with auto switch
	IR Source	Inbuilt Smart IR LEDs with intensity control
	Supplement Light Range	IR range: 30 ~ 40 m; white light range:30 ~ 40 m
Compression	Video Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG
	H.265 codec profile	Main Profile@Level4.1 High Tier
	Audio Compression	G711A / U
	Video Bit Rate	64Kbps ~ 8Mbps
Resolution and Frame Rate	Max. Resolution	6MP (3200×1800), 4MP (2688×1520), 2K (2560×1440),1080P (1920 × 1080), 720P (1280 × 720), D1, VGA (640 × 480), 640 × 360, CIF, 480 × 240
	Main Stream	60Hz: 6MP(1~20fps)/4MP/2K/1080P(1~30fps); 50Hz: 6MP(1~20fps)/4MP/2K/1080P(1~25fps)
	Sub Stream	60Hz : 720P/D1/VGA/640 × 360/480× 240/CIF(1~30fps); 50Hz: 720P/D1/VGA/640 × 360/480× 240/CIF(1~25fps)
	Third Stream	60Hz: D1/480× 240/CIF (1~30fps);50Hz: D1/480× 240/CIF(1~25fps)
Operational Features	Wide Dynamic Range (WDR)	120dB
	BLC	Supported
	ROI	Each ROI to be configured separately
	HLC	Supported
	DNR	Inbuilt 3D DNR (Digital Noise Reduction) circuit
	Codec Streaming Capability	Triple streaming
	Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser
	Smart Alarm	Motion detection, SMD, SD card full, SD card error, IP address conflict, cable disconnected, video exception(scene change, video blur and abnormal color detection), audio alarm, light alarm
	Security	Video encryption, firmware encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP/API
	General Function	Watermark, IP address filtering, video mask, heartbeat, smart supplement light, corridor pattern, ANR, system disarming, cloud upgrade
Network & Remote Monitoring	Protocols	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP, UPnP, HTTP, HTTPS, HTTP POST, NAT, QoS
	System Compatibility	ONVIF
	CMS	Full function CMS (Central monitoring software)
	Mobile Client Application	Supports android and iOS APP for Smart phone and tablets
	Web Browser	Chrome 105.0+/Edge 105.0+/Firefox 121.0+/Safari 14.0+
	Bandwidth Control	VBR (Automatic) and CBR (Manual) supported
	Online Connection	Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission
	Network Storage	Built-in micro SD card slot, up to 256GB

TECHNICAL SPECIFICATIONS


VV-NC41396B-AZWLIR1T1

Analytics Feature	Smart Features	Line crossing /region intrusion detection(human/motor vehicle/non-motor vehicle classification), abandoned/missing object detection			
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	2.8~12mm(W)	66m(218ft)	27m(87ft)	13m(44ft)	7m(23ft)
	2.8~12mm(T)	204m(669ft)	82m(269ft)	41m(135ft)	20m(66ft)
Interface	Ethernet	1 RJ45 10/100 self-adaptive ethernet port			
	Power Input	Standard DC Jack			
	Audio	1CH audio input; 1CH built-in MIC; 1CH audio output; 1CH built-in speaker			
	Reset	Yes, supported			
Electrical	Power Requirement	12 VDC/ PoE (IEEE802.3af)			
	Power Consumption	DC12V: <9.5; PoE: < 11.2W			
Environmental	Enclosure	IP66 weather proof enclosure			
	Mounting Bracket	Optional brackets available			
	Operating Temperature	-30°C to + 60°C			
	Storage Temperature	-30°C to + 65°C			
	Operating Humidity	95% or less (non-condensing)			
Mechanical	Installation	Ceiling mounting; wall mounting			
	Dimensions	217.6 × 80.5 × 80.3mm			
	Weight	Approx. 0.675KG			
Certifications	Certifications	CE, FCC, RoHS			

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Product image, weights and measurements are approximate and may vary due to customized solutions & products being offered as per customer requirements.

DIMENSIONS

Unit: mm

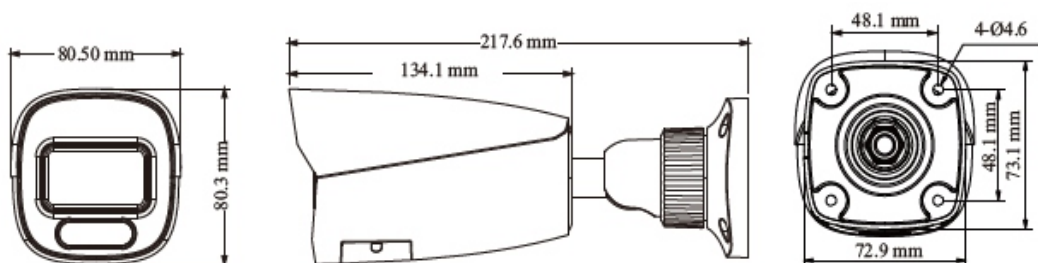

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO 9001 : 2008, ISO14001 : 2004 CERTIFIED COMPANY)

