

FULL HIGH DEFINITION 5MP IP BOX CAMERA

VV-NC9395S-AF0T1

CS MOUNT SMART CAMERA (Lens not included)



FEATURES

Full High Definition 5MP (2592 x 1944) resolution

Triple-Stream (H.265/H.264/MJPEG) supported

Support BLC, HLC, WDR, Defog and ROI

Support CVBS video output and two-way audio

Support P2P

Built-in Micro SD/SDHC/SDXC card slot, up to 128 GB

Onvif Supported



TECHNICAL SPECIFICATIONS

VV-NC9395S-AF0T1

Camera	Image sensor	1/3" Progressive Scan CMOS Sensor
	Signal System	PAL/NTSC
	Effective Pixels	2592 (H) × 1944 (V)
	Minimum Illumination	Color : 0.05 lux @F1.2, AGC ON; B / W : 0.01 lux @F1.2, AGC ON
	Electronic Shutter Speed	1 / 25 s ~ 1 / 100000 s
	Gain Control	Auto
	White Balance	Auto
	Signal to Noise	> 52 dB
	Auto Iris	DC Drive
Lens	Lens Mount	C/CS mount
	Focus	Manual Adjustment
	Zoom	Manual Optical Zoom Adjustment
Compression	Video compression	H.265/H.264/MJPEG
	H.265 codec profile	Main profile
	Video Bit Rate	64 Kbps ~ 10 Mbps
	Audio compression	G711A / U
Resolution and Frame Rate	Max. Resolution	2592 × 1944
	Main Stream	60Hz : 30fps(2592 × 1944, 2560 × 1440, 2304 × 1296, 1080P, 720P, D1, CIF) 50Hz : 25fps(2592 × 1944, 2560 × 1440, 2304 × 1296, 1080P, 720P, D1, CIF)
Operational Features	Wide Dynamic Range (WDR)	120dB
	Backlight Compensation	Supported
	DNR	Inbuilt 2D/3D DNR (Digital Noise Reduction) circuit
	High Light Compensation	Supported
	ROI	Each ROI to be configured separately
	Defog	Supported
	Codec Streaming Capability	Triple streaming
	Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser
	Onboard Storage	Built-in Micro SD / SDHC / SDXC card slot, up to 128GB
	Alarm Trigger	Motion alarm, sensor alarm
Network & Remote Monitoring	Protocols	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
	System Compatibility	ONVIF
	CMS	Full function CMS (Central monitoring software)
	Mobile Client Application	Supports android and iOS APP for Smart phone and tablets
	Bandwidth control	VBR (Automatic) and CBR (Manual) supported

TECHNICAL SPECIFICATIONS


WV-NC9395S-AF0T1

Interface	Ethernet	1 RJ45 10/100 Ethernet port
	Power Input	Standard DC Jack
	Audio Input	MIC IN × 1
	Audio Output	MIC OUT × 1
	Alarm Input	1CH/1CH
	PTZ	RS485 × 1
	Video Output	CVBS video output, 1Vp-p Composite Output (75Ω/BNC)
Electrical	Power Requirement (± 10%)	12 VDC ± 10% , PoE (802.3af)
	Power Consumption	< 2.5W
Environmental	Operating Temperature	-20°C to + 50°C
	Operating Humidity	90% or less (non-condensing)
Mechanical	Dimensions	70 × 145 × 60 mm
	Weight	400g
Certifications	Certifications	CE, FCC, RoHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Product image, weights and measurements are approximate and may vary.

DIMENSIONS

Unit: mm

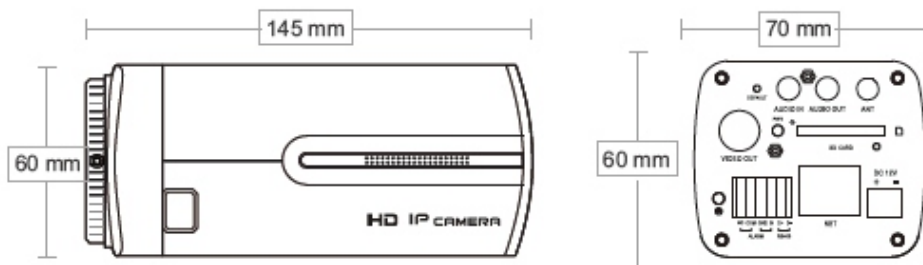

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO 9001 : 2008, ISO14001 : 2004 CERTIFIED COMPANY)

