


HIGH PERFORMANCE NETWORK VIDEO RECORDER

VV-NV3408-FP2ST1 8 CHANNEL PoE NVR

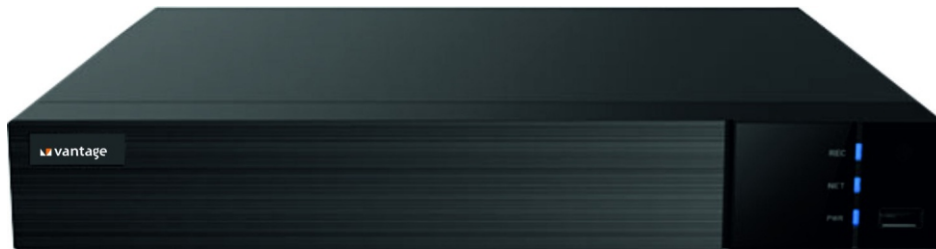

FEATURES

ONVIF Supported

Up to 8 Megapixels Resolution Display and Recording

H.265+ video compression technology with real time encoding

Full function CMS (Central monitoring software) supported

Two way audio supported

1x gigabit (10/100/1000Mbps) network port

Dual streaming technology to encode recording stream and network stream separately

Supports remote monitoring on Mobile Client (Android, IOS) and IE



POE



**Motion
Detection**



**E-mail
Alert**



**Mobile
Monitoring**

TECHNICAL SPECIFICATIONS

VV-NV3408-FP2ST1

System	Operating System	Embedded Linux Operating System
	Multiplex Operations	Simultaneous multi-channel real-time recording, playback, network operation, USB backup
	User interface	Support 16-bit true color graphical menu interface and mouse operation
Bandwidth	Incoming / Outgoing	80 Mbps / 80 Mbps
Interface	IP Video Input	8-ch
	Two way Audio Input	1-ch, RCA
	VGA Video Output	1920x1080 / 1280 x 1024 / 1024 x 768
	HDMI 1 Video Output	3840 x 2160/ 1920 x 1080 / 1280 x 1024/ 1024 x 768
	Audio Output	1-ch, RCA
	Alarm Input / Output	Supports IPC alarm input/output
	Network	1 x Gigabit (10/100/1000) ethernet port (RJ45)
	USB	USB 2.0 x 2
Resolution & Frame Rate	Multi-Screen Display	1/4/6/8/9
	Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080P/1280x1024/960P/720P/960H/D1/CIF
	Frame Rate	NTSC:30fps; PAL:25fps
	Live View/ Playback	1x8MP@30fps; 6x1080P@30fps
Compression	Simultaneous Playback	Max. 8 CH
	Video Compression	H.265S /H.265+ / H.265 / H.264
Network & Remote Monitoring	Audio Compression	G.711(U/A)
	Protocols	TCP / IP, IPv4, IPv6, UDP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, HTTP, SMTP, HTTPs, 802.1x, RTSP, RTP, RTCP, WebSocket, SNMP, IGMP, ONVIF
	DDNS	Supported; Dynamic and Static IP support
	CMS	Full function CMS (Central Monitoring Software)
	Mobile Client Application	Supports android and iOS APP for Smart phone and tablets
	Bandwidth control	VBR/CBR
Features	Client Connection	Max. 64 users access
	Security	Password Protection, User Management
	Playback Function	Play, pause, FF, FB, digital zoom, etc.
	Search Mode	Time slice / time / event / tag / smart search
	Alarm Trigger	Record, snap, preset, e-mail, etc.
Face	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
	Face Detection Performance (AI by IPC)	8CH
	Face Detection Performance (AI by Device)	2CH
	Face Match Performance	No
	Statistical Graph of Information	Bar graph
Video Structure Analysis	Statistical Mode of Information	Statistics by day, week, month, quarter as well as customized time period
	Human/Vehicle Classification (AI by IPC)	8CH
	Human/Vehicle Classification (AI by Device)	2 CH
	Human/Vehicle Attribute Analysis	Yes (AI by IPC)

TECHNICAL SPECIFICATIONS



VV-NV3408-FP2ST1

Recording & Storage	Recording Mode	Manual, sensor, motion, exception, smart events
	Record Stream	Dual stream recording
	Storage	SATA 3.0 x 2, max 10TB
	Local Backup	U disk, USB mobile HDD
	Network Backup	Supported
PoE	PoE Port	8xRJ45 100Mbps
	Standard	IEEE802.3AF/AT
	Output Power	≤ 80W
General	Power Supply	DC48V/2.5A
	Power Consumption	<10W (without HDD)
	Operating temperature	-10°C to + 50°C
	Working Humidity	90%
	Dimensions	380 x 268x 45 (W x D x H)
Certifications	Certifications	CE,FCC,RoHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Product image, weights and measurements are approximate and may vary.

Dimension

Unit: mm

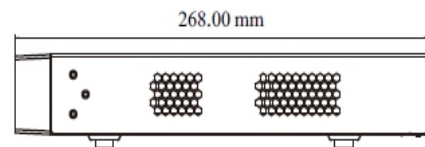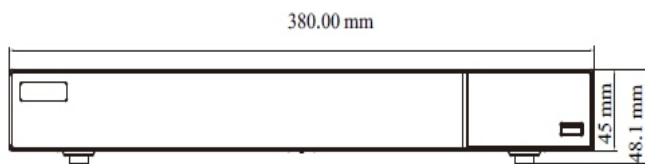

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO 9001 : 2008, ISO14001 : 2004 CERTIFIED COMPANY)

