

ACCESS & TIME MANAGEMENT SYSTEM

VV-RF106S-CAS5

STANDALONE ACCESS CONTROLLER & WIEGAND READER



FEATURES

Waterproof Metal alloy Case

User Capacity of 2,000 Cards & Password

Wiegand 26-37 Bits Output

Supports 125 kHz EM & HID cards

Supports 13.56 MHz Mifare cards (optional)

Backlit Digital Touch Keypad

Dual Function as Single Door Standalone Controller & Wiegand Reader

Supports Anti tamper, Anti-Vandal & Anti-Pass Back Function



IP65
Waterproof



2000
User



Card



Access
Control



Touch
Keypad

TECHNICAL SPECIFICATIONS


WV-RF106S-CAS5

Users	Support 2000 Cards & Password Users
Card Support	EM & HID 125kHz (Mifare 13.56 MHz optional)
Wiegand Input & Output Format	26-37 bit
Keypad Transmission Format	Multi touch panel
Input voltage	DC 12~24V
Operating Temperature	-40~60°C (-40°F~140°F) (For EM & HID Card Version) -20~60°C (-4°F~140°F) (For Mifare Card Version)
Operating Humidity	0~95% (non-condensing)
Ingress Protection Rating	IP65
Dimensions	125mm×83mm×21.7mm (L×W×H)
Certification	CE,FCC,RoHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

DIMENSIONS

Unit: mm

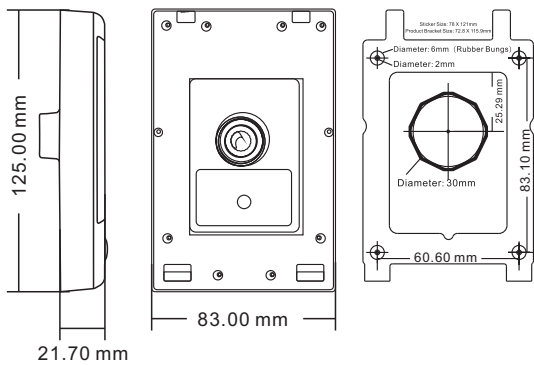

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902-793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO 9001 : 2008, ISO 14001 : 2004 CERTIFIED COMPANY)

