




RFID BASED ACCESS CONTROL SYSTEM

W-RF200U-EME2 USB BASED RFID ENROLLMENT READER



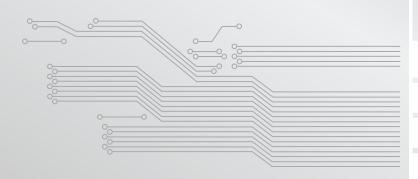

FEATURES

Wiegand-based USB Enrollment Readers for enrollment of RF cards

Operating frequency of 125 kHz

Read range of 2-3cm

Table top design



www.vantagesecurity.com

CE FC TROHS

TECHNICAL SPECIFICATIONS:

W-RF200U-EME2

Parameter	Specifications
Working Voltage	DC 5V (USB Power)
Working current	<=100mA
Reading Range	3 to 5cm
Dimension	110 X 80 X 25(mm)
Output Format	USB
Working Temperature	10~+70 °C
Working Humidity	10% to 95% R.H
Card Type	EM/Mifare
Color	Black
Certifications	CE, FCC, ROHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

1

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton West Midlands, WV6 0JZ United Kingdom Ph:+44-1902-793383, Email: sales@vantagesecurity.com www.vantagesecurity.com (AN ISO 9001 : 2008, ISO 14001 : 2004 CERTIFIED COMPANY)

