




SECURITY ALARM SYSTEMS

VV-SA300K-GSK2

GSM BASED WIRELESS SECURITY ALARM SYSTEM



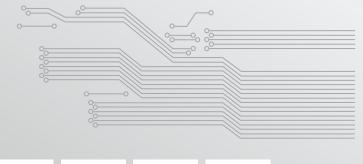



FEATURES

vantage

4 zones wireless/wired optional, 2 zones wireless

Read RFID card to disarm, can learn 20 cards

Simple operation with voice prompt, very easy to use

Control panel can be used as a normal cell phone to call other phones directly

Mobile APP to control main panel, supports IOS/Android

One-way alarm linkage wireless relay, and one-way wireless strobe siren

Operating frequency 433MHz

Built-in 80dB siren, external siren up to 120dB



TECHNICAL SPECIFICATIONS

VV-SA300K-GSK2

Parameter	Specifications
Power Supply	DC12V/1A
Stantby current	<25mA
Operating current	<450mA
Internal siren	80dB
Accessories	Up to 6 sensors
Radio frequency	433MHz
Housing material	ABS plastic
Working Temperature	-10°C~+55°C
Working Humidity	<=80% (non-condensing)
GSM frequency	850/900/1800/1900MHz
Receiving Distance	>30M
Certifications	CE, FCC, ROHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

1

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED.

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton West Midlands, WV6 0JZ United Kingdom Ph:+44-1902-793383, Email: sales@vantagesecurity.com www.vantagesecurity.com (AN ISO 9001 : 2008, ISO 14001:2004 CERTIFIED COMPANY)

