


HIGH PERFORMANCE NETWORK VIDEO RECORDER

VV-NV2036-2SL3 36 CHANNEL NVR

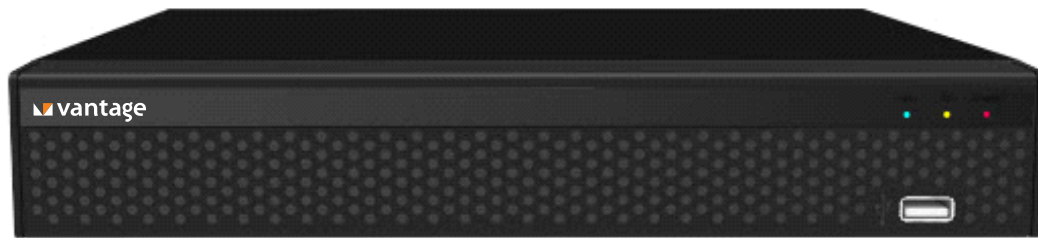

FEATURES

ONVIF Supported

Up to 12 Megapixels Resolution Display and Recording

H.265+ video compression technology with real time encoding

Full function CMS (Central monitoring software) supported

Two way audio supported

Gigabit (10/100/1000) network port

Supports remote monitoring on Mobile Client (Android, IOS) and IE



Motion
Detection

E-mail
Alert

Mobile
Monitoring

TECHNICAL SPECIFICATIONS

VV-NV2036-2SL3

System	Operating System	Embedded Linux Operating System
	Multiplex Operations	Simultaneous multi-channel real-time recording, playback, network operation, USB backup
	User interface	Support 16-bit true color graphical menu interface and mouse operation
Bandwidth	Bandwidth In / Out	300Mbps / 150Mbps
Interface	IP Video Input	36-ch
	Two way Audio Input	1-ch, RCA (2.0 Vp-p, 1kΩ)
	VGA Video Output	1920x1080P/60Hz, 1280x1024/60Hz, 1280x720/60Hz
	HDMI Video Output	4K (3840 x 2160)/30Hz, 4K (3840 x 2160)/60Hz, 1920 x 1080/60Hz, 1280 x 1024/60Hz, 1280 x 720/60Hz, 1024 x 768/60Hz
	Audio Output	1-ch, RCA (Linear, 1kΩ)
	Audio Compression	G711u, G711a
	Network	1 x Gigabit (10/100/1000) ethernet port (RJ45)
	USB	1 USB 2.0 Interfaces ,1 USB 3.0 Interface
Resolution & Frame Rate	Recording Resolution	12MP(4000x3000), 4k(4096x2160), 5MP(2592x1944), 4MP(2688x1520), 3MP(2048x1536), 1080P(1920x1080), 960P(1280x960), 720P(1280x720), D1 (720x576/720x 480)
	Frame Rate	Main stream: 25 fps (P) / 30 fps (N); Sub stream: 25 fps (P) / 30 fps (N)
	Playback Resolution	3CH 12MP@15fps, 4CH 4K@30fps, 6CH 30fps, 10CH 3M@30fps, 5MP@30fps, 8CH 4MP@16CH 1080P@30fps, 16CH 960P@30fps, 16CH 720P@30fps
	Max playback capability	Max 16 ch playback
Network & Remote Monitoring	Protocol	TCP/CP, HTTP, UPnP, DNS, NTP, SMTP, PPPoE, DHCP, FTP, DDNS, RTP, RTSP, RTCP, P2P, Onvif
	DDNS	Supported; Dynamic and Static IP support
	CMS	Full function CMS (Central Monitoring Software)
	Mobile Client Application	Supports android and iOS APP for Smart phone and tablets
	Bandwidth control	VBR / CBR (Manual) supported
Features	Security	Password protection, user management
	Playback Function	Play, Pause, Fast forward, Backward, Digital zoom
	Search Mode	Time/Date, Alarm, Motion Detection & Exact Search (accurate to second)
	Alarm Notifications	FTP, Email notification supported
Recording & Storage	Video Compression	H265/H264/H265+/H264+
	Recording Mode	Manual\Timer\Motion Detection
	Storage	2 SATA port up to 12TB
	Overwrite Mode	Supported
General	Power Supply	DC12V/4A
	Power Consumption	<12W (Hard disk not included)
	Operating temperature	-10°C to + 55°C
	Working Humidity	95% or less (non condensing)
	Chassis	Standalone 1U chassis
	Dimensions	310x295x46(mm)
	Weight	3.5Kg
Certification	Certification	CE, FCC, RoHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Product image, weights and measurements are approximate and may vary.

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO 9001 : 2008, ISO14001 : 2004 CERTIFIED COMPANY)

